



Façade Support & Restraint Wall Ties & Restraints

Leviat®

A CRH COMPANY

Design Sheet - SAH Sliding Anchors and Ties

Please provide: contact details; project details; head type & wall tie requirements

Purpose of Your Enquiry (tick box as appropriate)

☐ Quotation required ☐ Specification ☐ Order

Contact Details

Contact name

Company

Address

.....

.....

Tel

Email

Project Details

Project name

Project address

.....

.....

.....


.....

Order No. (if applicable)


Standard dimensions are shown. Complete all necessary boxes to specify your product requirements.

Standard Head Options


SAH - U

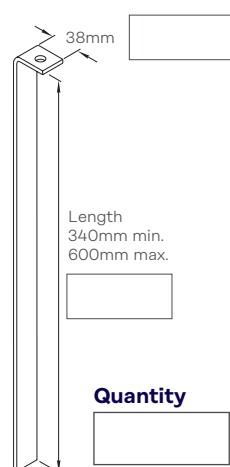


SAH - UF

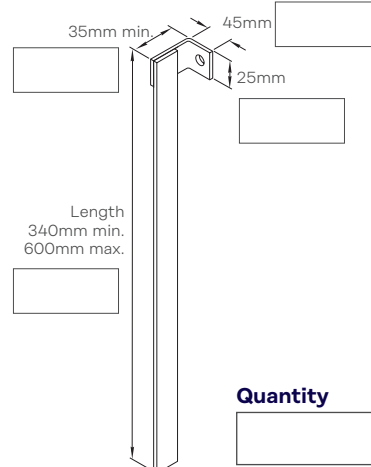


SAH - UO

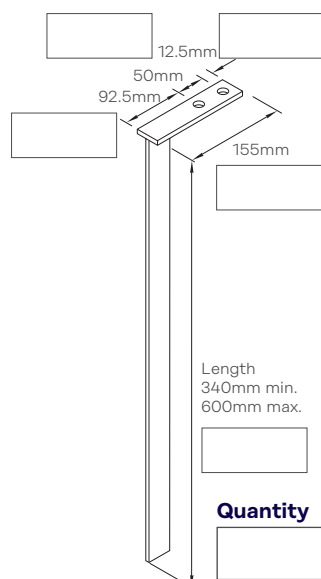

SAH - UT

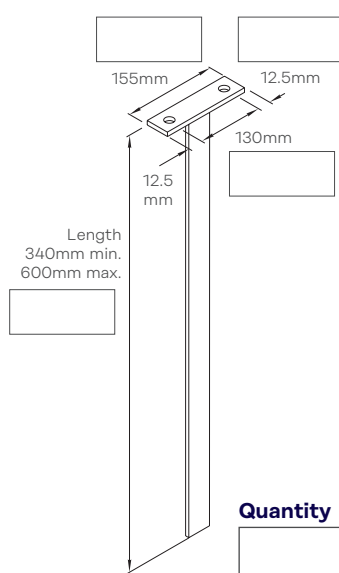

SAH - UC

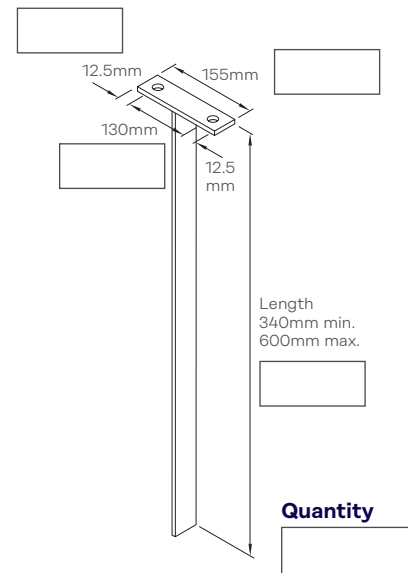


Design Sheet

SAH Sliding Anchors and Ties


Wall Ties

SIS
Two Way Tie
Standard Lengths
200, 230mm

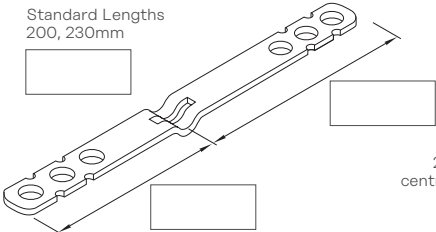

Quantity

SPJ
One Way Tie
Standard Lengths
135, 150mm

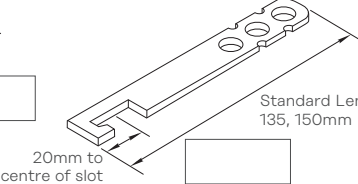


Quantity

Substrate	Hole diameter in SAH head	Fixing
Concrete (post-fixed)	12mm	FAZ II Plus 10/30R expansion bolt
Concrete (28/15 cast-in channel)	12mm	T281030 M10x30mm T-head bolt
Concrete (30/20 cast-in channel)	14mm*	T301250 M12x50 T-head bolt
Steel (with access to rear)	12mm	M10x40mm isolated setscrew
Hollow steel (4-12mm thick)	7mm*	SDTSS-38-5PT self-drilling/ tapping screw

*Non-standard hole size

Non-Standard Head Options

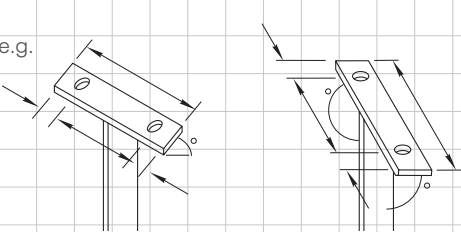

Please sketch requirements and provide dimensions.

Quantity

Submit Form