

DECLARATION OF PERFORMANCE

We hereby declare that the product range identified as,

SDV, 226-300mm

conforms to the provisions of, ZA Annex, EN 845-1:2013+A1:2016 as an Asymmetrical Wall Tie.



Declaration Number:	L0014-00-CE
Intended Use:	Slotted frame cramp for connecting a new masonry leaf to an existing structure. Suitable for cavities from 146mm to 245mm.
Notified Body:	Technical and Test Institute for Constructions Prague, Branch 0600 - Brno, Hněvkovského 77, 617 00 Brno - Komárov, Czech Republic
Notified Body Number:	1020

This product conforms to $\mathbf{System}\ \mathbf{3}$ – Assessment and Verification of Constancy of Performance. All necessary testing was conducted at the above notified body.

Essential Characteristics		
Compressive Load Capacity (cavity +15mm):	1870N	
Tensile Load Capacity (at min embedment, fixing located at centrally in slot):	1610N (refer to page 2 for additional information)	
Capacities given for:		
Overall Wall Tie Length:	226mm-300mm	
Design Cavity Width:	146mm-245mm	
Minimum Embedment Depth:	50mm	
Minimum Cover to Face of Wall:	20mm	
Minimum Mortar Joint Thickness:	10mm	
Minimum Mortar Class:	Type M2	
Displacement at 1/3 Load Capacity		
In Compression:	0.49	
In Tension:	0.91	






DECLARATION OF PERFORMANCE

Failure Modes:		
In Compression:	Bending of tie	
In Tension:	Bending of tie	
Water Shedding Capacity:	Resistant	
Recommended Spacing:	As required	
Durability		
Material Coating Reference:	3	
Steel Grade:	1.4301/1.4401	
Dangerous Substance	None	

Tensile load capacity of the SDV is affected by the fixing position within the slot - the graph shows the difference in performance when the fixing is located at the bottom, middle and top of the slot for a 2.5mm thick SDV tie (125 -225mm long, refer to DoP reference L0013)

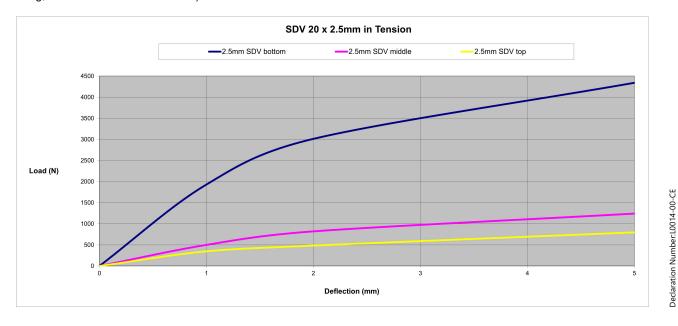

Signed for and on behalf of the manufacturer by

Rune Magnusson

Regional Managing Director, UK & Asia

11th July 2025

Manufactured by; **Leviat Limited** President Way President Park Sheffield, S4 7UR

United Kingdom

