

**Design  
Program**  
available

**Enhanced Performance Loads  
in Slab-to-Wall Moment Connections**



**TECHNICAL  
APPROVAL**

5061



002

**Ancon®**

**KSN Anchors Reinforcement  
Continuity System**

for the Construction Industry





# **We are one team.** **We are Leviat.**

Leviat is the new name of  
CRH's construction accessories  
companies worldwide.

Under the Leviat brand, we are uniting the expertise, skills and resources of Ancon and its sister companies to create a world leader in fixing, connecting and anchoring technology.

The products you know and trust will remain an integral part of Leviat's comprehensive brand and product portfolio. As Leviat, we can offer you an extended range of specialist products and services, greater technical expertise, a larger and more agile supply chain and better, faster innovation.

By bringing together CRH's construction accessories family as one global organisation, we are better equipped to meet the needs of our customers, and the demands of construction projects, of any scale, anywhere in the world.

**This is an exciting change. Join us on our journey.**

**Read more about Leviat at [Leviat.com](https://www.leviat.com)**



Our product brands include:

**Ancon®**

  
**HALFEN**

**HELIFIX** 

 **ISEDIO**

**PLAKA**



**60**

locations

sales in  
**30+**  
countries

**3000**

people worldwide

**Imagine. Model. Make.**

**Leviat.com**

# KSN Anchors

## Safer, faster, easier construction joints

Ancon KSN Anchors, in combination with Bartec Plus parallel-threaded reinforcing bars, simplify concrete construction joints.

Together, they allow engineers to design slab-to-wall connections without the restrictions on bar length and bar diameter of re-bend continuity systems or the awkward anchorage lengths demanded by reinforcing bar couplers.

KSN Anchors are cast into the concrete wall and, when the formwork and thread protection are removed, the reinforcing bars are simply screwed into the anchors.


This is a quicker, easier, and above all safer continuity system. It eliminates the drilling of formwork or concrete and the dangers associated with projecting bars and on site bar straightening. It replaces hooked bars and stirrups, simplifying bar scheduling and minimising congestion in the wall.

Unlike pull-out bar systems, there is virtually no restriction on continuation bar length and they are available in a greater choice of bar diameters.

In addition to their suitability for direct tensile applications, independent tests have verified an enhancement in the performance of KSN Anchors when used in slab-to-wall moment connections.

### Design Software

Our free design program is available to download from [www.ancon.co.uk](http://www.ancon.co.uk) to simplify the specification of KSN Anchors. This easy-to-use interactive software enables calculations for moment connections and tension only applications.

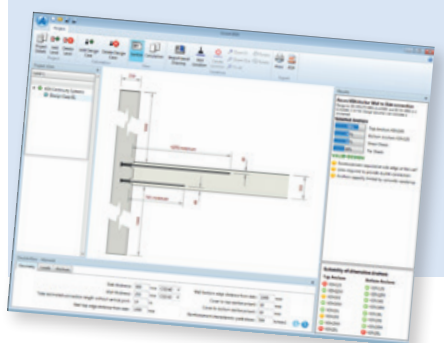

## Contents

<b>System Components, Details for Specifying and Ordering</b>	<b>4-5</b>
<b>System Performance, Bottom Anchorage Options</b>	<b>6-7</b>
<b>Key Design Considerations</b>	<b>8</b>
<b>Anchor Selection Examples</b>	<b>9</b>
<b>Direct Tensile Concrete Characteristic Loads</b>	<b>10-11</b>
<b>Tensile Concrete Characteristic Loads in Moment Connections</b>	<b>12-14</b>
<b>Design Considerations - Reinforcement Details, Bottom Anchor Design Guidance, Ductility Requirements, Corners, Shear Checks</b>	<b>15-19</b>
<b>Installation Procedure and Guidance on Cutting Anchor Carrier</b>	<b>20-22</b>
<b>Other Ancon Products</b>	<b>23</b>



### Traditional slab-to-wall construction joint

Drilling of formwork required, projecting reinforcing bars and congestion in the wall.



### Re-bend continuity system

Box dimensions restrict bar length and diameter. On-site bar straightening required.



### Reinforcing bar couplers


Awkward anchorage bars. Congestion in the wall. No shear key. Individual coupler installation slows site progress.



### High performance, KSN Anchor system

Anchors installed in a carrier. Indented construction joint. Virtually unlimited bar length. No bending of bars required. Less congestion in the wall.



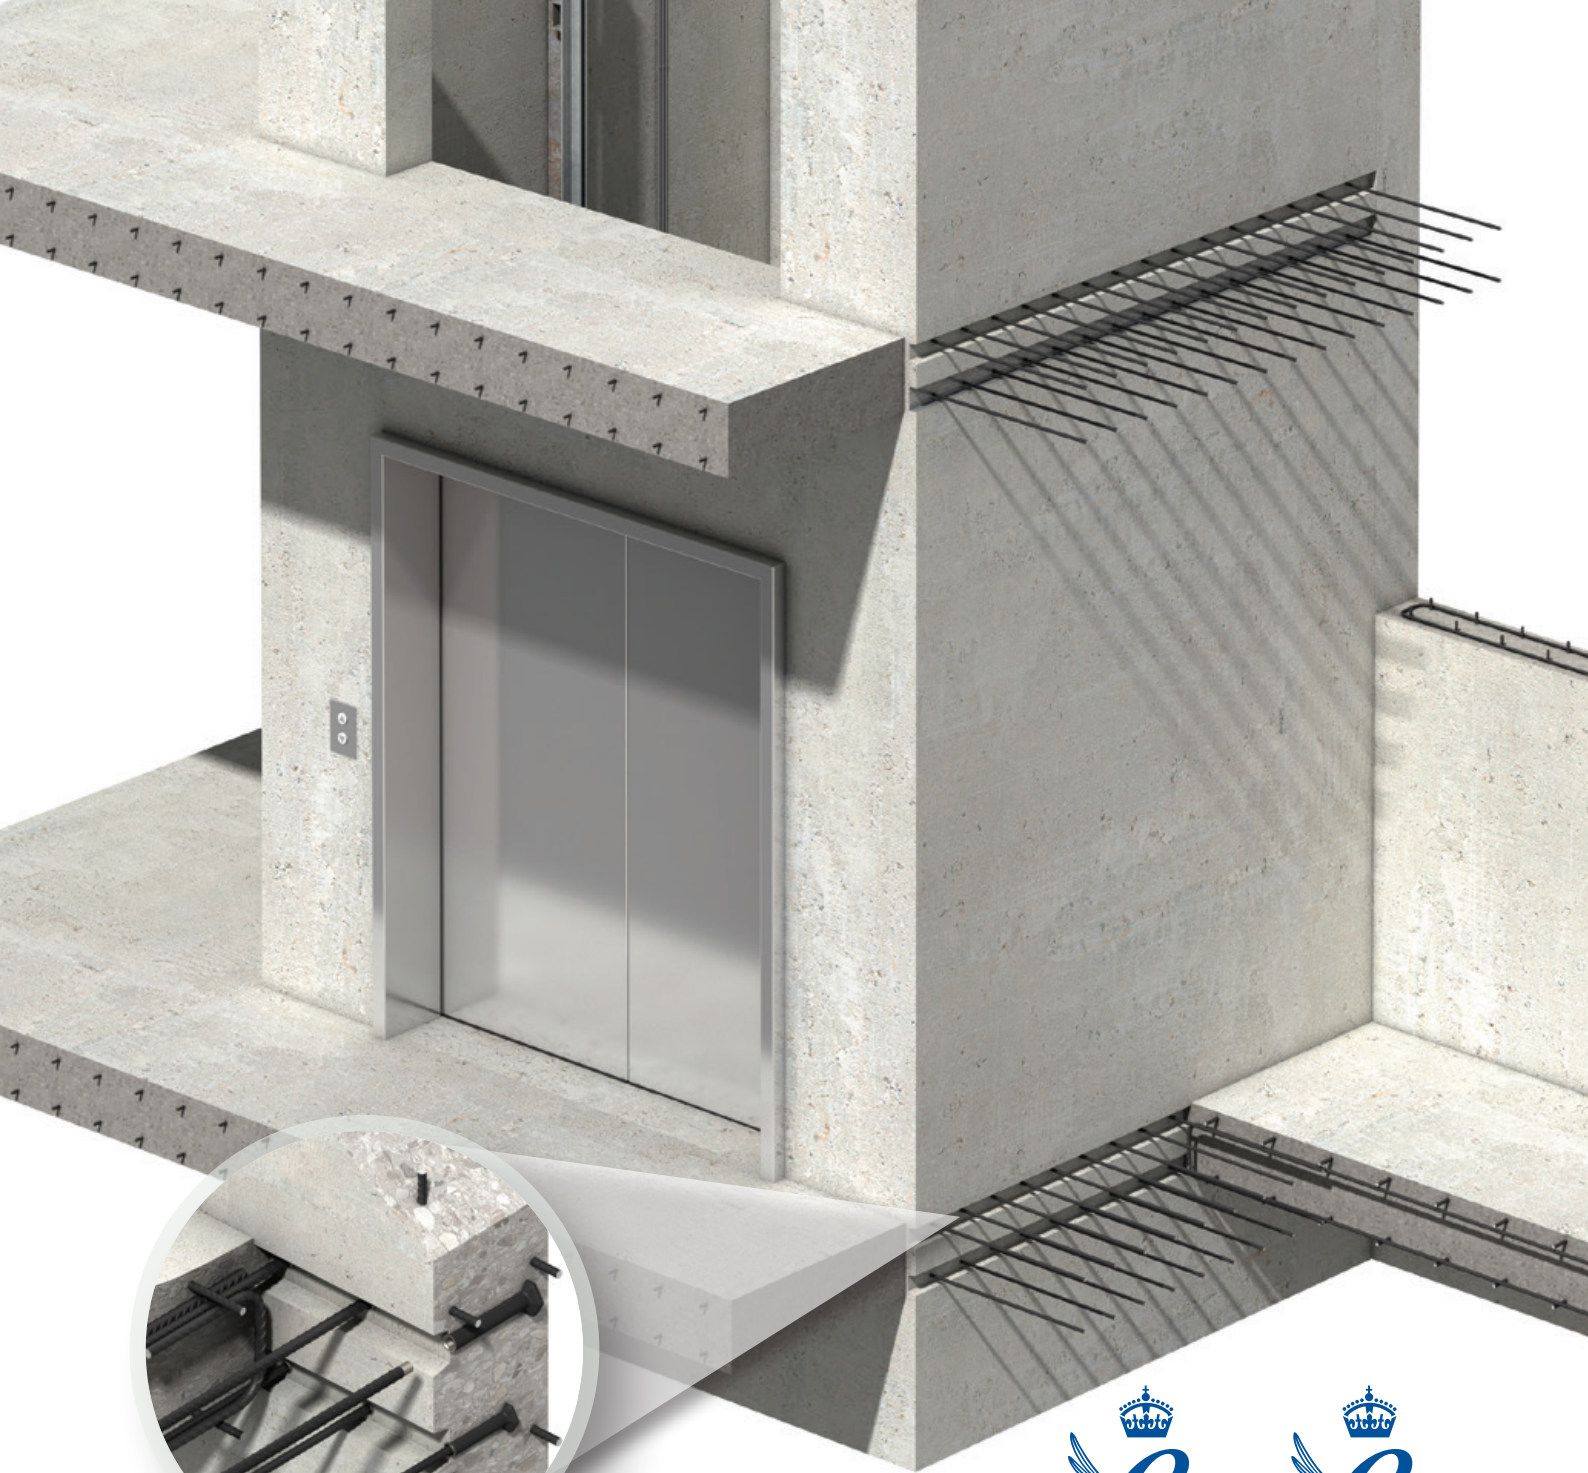

Technical Approval  
TA 5061



Eliminates risks  
associated with on-site  
bar straightening



Virtually unlimited  
continuation bar length.  
Suitable for  
EC2 lap lengths



Standard components  
for 'just-in-time' site  
delivery, direct from  
stock



Simple to schedule.  
Fast to install



BIM object  
available



Easy visual check of  
correct bar engagement



No torquing  
required



Reduces reinforcement  
congestion. Ideal for  
thin walls



EC2 indented  
construction joint



Enhanced performance  
backed by test data



Design software  
available

# Ancon KSN Anchors

Ancon KSN Anchors, in combination with Bartec Plus parallel-threaded reinforcing bars, simplify concrete slab-to-wall construction joints when compared to other continuity systems.


This quicker, easier and above all, safer system eliminates the need for on-site bar straightening and the drilling of formwork or concrete. The system replaces hooked anchorage bars and stirrups, thereby simplifying bar scheduling and minimising congestion in the wall. Suitable for wall thickness from 175mm.

Independent tests have verified enhancements in anchor performance in moment-resisting connections. This enhancement is specific to the KSN range. The system carries CARES Technical Approval TA 5061.

## System Components

### KSN Anchors


There are eight standard anchors in the KSN range. They are manufactured from highly reliable Cr-Mo alloy steel with a minimum 15% elongation. The head is formed by hot forging to minimise material usage and improve the strength characteristics. The anchor is subsequently machined to incorporate a standard metric Bartec thread. Independent tests have verified the direct pull out strength of these anchors (see pages 10 to 11) and also quantified the enhancement in performance of KSN Anchors when used in slab-to-wall moment connections (see pages 12 to 14).

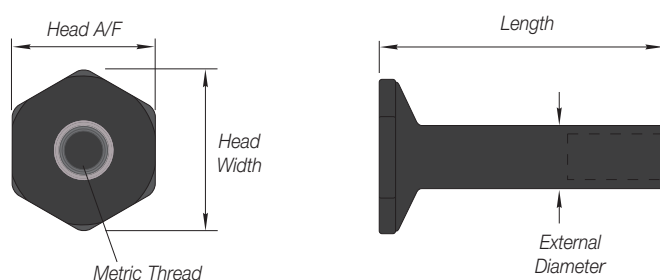

KSN Anchors, eight standard sizes available from stock

### KSN Anchor Dimensions

Anchor Ref.	Nominal External Diameter (mm)	Metric Thread (mm)	Nominal Head Width (mm)	Nominal Head A/F (mm)	Anchor Length (mm)	Embedment $h_{eff}$ mm
KSN12S	22	M16 x 2.0	46	40	115	142
KSN12M					150	177
KSN16S	28	M20 x 2.5	61	53	130	157
KSN16M					160	187
KSN16L					190	217
KSN20S	32	M24 x 3.0	75	65	150	177
KSN20M					190	217
KSN20L					230	257

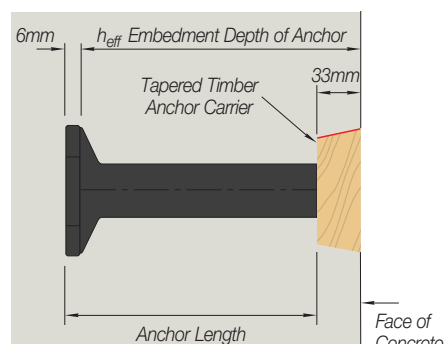

Anchor Embedment Arrangement

### KSN Tapered Timber Anchor Carrier

KSN Anchors are delivered to site pre-assembled as independent rows of anchors fixed with countersunk socket head cap screws to the back of a tapered timber strip.

The timber provides an additional 33mm of embedment to each KSN Anchor and, after removal, provides a shear key for the joint. By increasing the embedment depth, the capacity of a KSN Anchor is improved.

The timber features one coloured side to denote the upward facing edge when orientating it against formwork and a product label to identify it as either a top or a bottom row of anchors. Tape is provided on the front of the strip to protect the socket head from concrete ingress to facilitate easy removal. A formwork release agent should be applied to the timber on site.



Tapered timber strips simplify installation, create a shear key and increase anchor embedment




## Bartec Plus Continuation Bars


Unlike re-bend continuity systems where bar lengths are restricted to the box dimensions, there is virtually no restriction on continuation bar length with KSN Anchors.

Ancon KSN Anchors are designed for use with 12mm, 16mm and 20mm diameter grade B500B or B500C reinforcing bar, threaded with a Bartec Plus metric thread, supplied by us. The Bartec Plus system produces a full strength joint. The bar end is cut square and enlarged by cold forging. This increases the core diameter of the threaded portion of the bar to ensure that the strength of the bar is maintained. A parallel metric thread is rolled onto the enlarged bar end. A 12mm bar is provided with an M16 thread, a 16mm bar with an M20 thread and a 20mm bar with an M24 thread.

Bar lengths to BS EN 1992-1-1 (Eurocode 2) are given in the tables below.

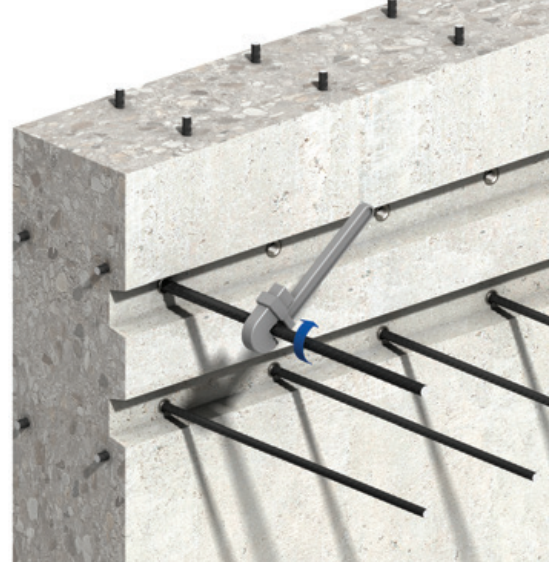

No on-site bar straightening required

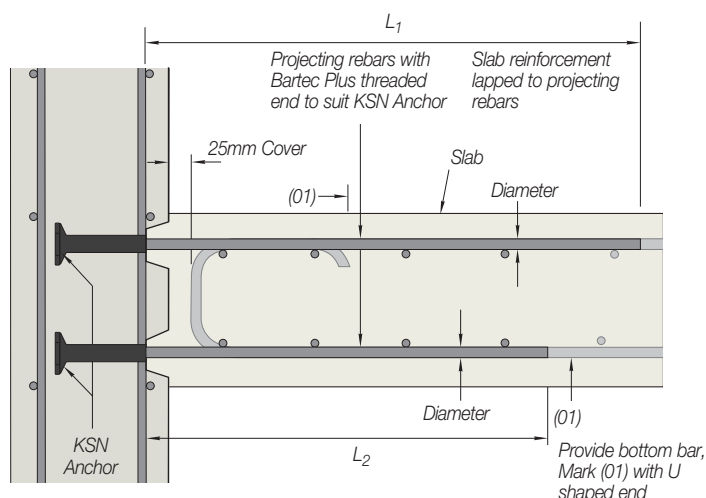

12, 16, 20mm diameter Bartec Plus continuation bars, available in EC2 lap lengths

### Top Reinforcement to Eurocode 2

Bar Diameter	Thread Size	EC2 Full Tension Lap* C32/40		Minimum Length L <sub>1</sub> Required C32/40		Thread Length	Minimum Bar Length Required Good Bond	Minimum Bar Length Required Bad Bond
		Good Bond	Bad Bond	Good Bond	Bad Bond			
12	M16	630	890	688	948	16	705	965
16	M20	830	1190	888	1248	40	910	1270
20	M24	1040	1480	1098	1538	24	1125	1565

Dimensions in millimetres.

\*Assumes contact lap ( $\alpha_2=1$ ) and 100% of bar lapped at one location.

### Bottom Reinforcement to Eurocode 2

Bar Diameter	Thread Size	EC2 Tension Lap* C32/40	Minimum Length L <sub>2</sub> Required C32/40	Thread Length	Minimum Bar Length Required
12	M16	630	688	16	705
16	M20	830	888	40	910
20	M24	1040	1098	24	1125

Dimensions in millimetres.

\*Assumes contact lap ( $\alpha_2=1$ ) and 100% of bar lapped at one location.

**Note:** Good bond and bad bond conditions as defined in BS EN 1992-1-1 figure 8.2.

Refer to page 16 for bottom anchor design guidance.

## Specification Code

An Ancon KSN Anchor system can be specified using the following identification method:

Anchor Ref. / Horizontal Spacing (mm) / Anchor Position in Slab (TOP or BOTTOM) / Cover (mm)

e.g. **KSN16S / 200 / TOP / 25**


This is the reference for a KSN system comprising KSN16S anchors to be installed at 200mm horizontal spacing in the top of the slab, with 25mm cover to the reinforcement.

# Ancon KSN Anchors

## System Performance

Performance values for KSN Anchors are presented on pages 10 to 14 for two load applications and are based on comprehensive test data. A design program is available to download online.

### Direct tensile concrete characteristic loads



The direct pull out strength of anchors embedded in concrete has been the subject of extensive research over many years. To determine the direct pull strength of KSN Anchors, we commissioned a test programme at Heriot Watt University, UK. The test results and subsequent analysis aligned closely with established formula for the pull out strength of anchors. The direct pull out strength is based on a model with a break out prism angle of approximately 35 degrees. See Fig A.

Characteristic loads as per the CEB Design of Fastenings in Concrete:

$$N_{Rk,c}^0 = k_1 \cdot f_{ck}^{0.5} \cdot h_{eff}^{1.5}$$

Where:

$N_{Rk,c}^0$  is the tension resistance of a single anchor remote from edge effects

$f_{ck}^{0.5}$  is the characteristic concrete cylinder compressive strength

$h_{eff}$  is the embedment depth of the anchor

$k_1$  is an empirical coefficient

$$k_1 = 12.5$$

The equation becomes

Design resistance

$$N_{Rd,c}^0 = k_1 f_{ck}^{0.5} \cdot h_{eff}^{1.5} / \gamma_{m,c}$$

with  $\gamma_{m,c} = 1.5$  as per Eurocode 2.

### Anchor Spacings

Although KSN Anchors are able to provide an anchorage that is equal to or greater than the characteristic yield strength of the reinforcing bars, this is dependent on their embedment and arrangement. The capacity of the anchors is reduced when the proximity of adjacent anchors or concrete edges affect the development of the full cone, as illustrated in Fig B. Load data for reduced anchor spacing is printed in the tables on pages 10 to 14.

To achieve the maximum anchor load, the required minimum spacing is three times the depth of the anchor  $h_{eff}$ .

Fig A. Full Tensile Cone




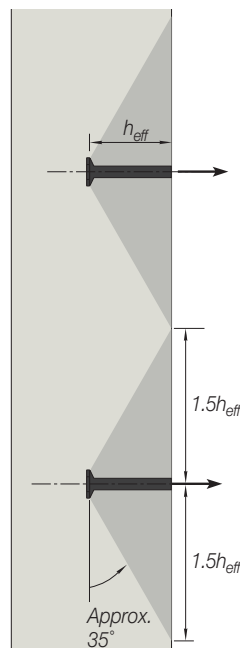


Fig B. Reduced Spacings

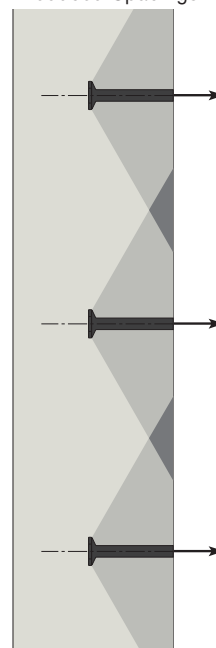


The tables on pages 10 to 14 assume that the close edge distances  $C_x$  and  $C_y$  are catered for by either (1) ensuring  $C_x$  and  $C_y$  are equal to or greater than  $1.5 \times h_{eff}$  or (2) local reinforcement is provided (see page 15). In addition, where moment connections are used, the top of the wall shall be at least three times the effective embedment of the anchor ( $h_{eff}$ ) measured from the centre line of the anchor. If these conditions cannot be met, please contact Leviat.

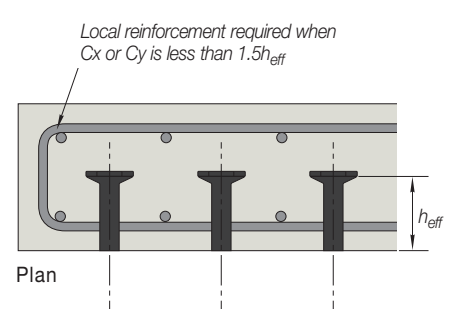

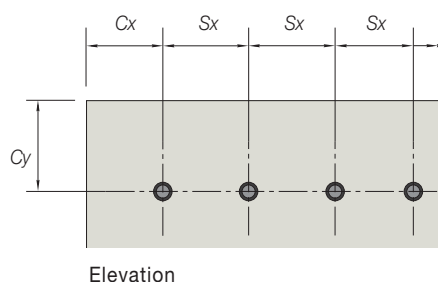

## Tensile concrete characteristic loads in slab-to-wall moment connections



From the tests conducted to determine the direct pull out capacities of KSN Anchors (see page 6), we identified a potential increase in anchor performance when the compression part of the moment couple lies within the pull out cone.

Although design procedures for the direct pull out strength of cast-in anchors are well established, existing procedures do not cover anchors within moment resisting connections, such as slab-to-wall applications. Therefore, we commissioned a further series of tests at Heriot Watt University to determine the degree of enhancement in concrete cone pull out capacity in typical slab-to-wall connections and establish a design method based on the results.


The tests verified an enhancement in concrete cone capacity, when the pull out failure surface is modified by the presence of an adjacent compression force from the concrete forming part of the couple. The results showed a significant enhancement in some cases; the enhancement being strongly influenced by the ratio of the depth of the embedment of the head of the anchor to the effective depth of the anchor in the slab  $h_{eff}/d$ .

An empirical expression has been derived for the strength of KSN Anchors where the concrete cone failure is modified by an adjacent compression reaction.

Load data for KSN Anchors in moment resisting slab-to-wall connections is provided in the tables on pages 12 to 14.

The enhanced performance figures were quantified by our test programme and subsequent design procedure and are therefore specific to the KSN Anchor range.

The tests used KSN Anchors in the paired arrangement shown. The diagram illustrates how the full pull out cone is modified by an adjacent compression zone.

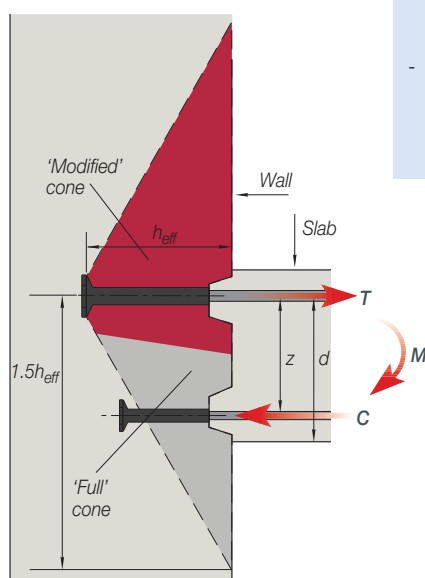


Idealised modified concrete failure.  
Paired arrangement used in testing.

The calculation model we have developed is compatible with guidance in the following documents:


- Fib model code 2010 and fib bulletin 58 "Design of anchorages in concrete", part 3.
- ACI 318-11: Building Code Requirements for Structural Concrete, American Concrete Institute, Appendix D: Anchoring to Concrete.
- DD CEN/TS 1992-4-2:2009 Design of fastenings for use in concrete part 4-2: Headed fasteners (6.2.5)
- BS EN 1992-1-1: Eurocode 2 Design of concrete structures. Compliance with the safety concept of the code.
- DIN1045-1 Plain reinforced and prestressed concrete structures. Compliance with the safety concept of the code.

## Bottom Anchorage Options


In the moment connection configuration, the tension at the joint is resisted by the top anchor and the compression by the concrete. However, part of the span bottom reinforcement needs to be anchored in the wall according to BS EN 1992:1-1 (Eurocode 2) Clause 9.3.1.2. This anchorage of bottom reinforcement may be provided using KSN Anchors, an Ancon Eazistrip reinforcement continuity system or an Ancon Coupler Box.

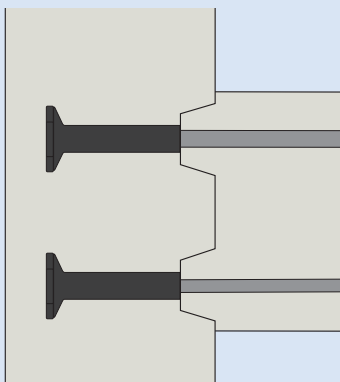

KSN Anchors at top and bottom

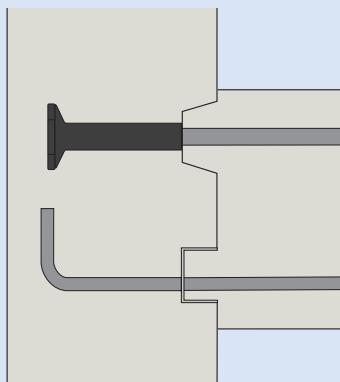

KSN Anchor at top and  
Eazistrip system on bottom

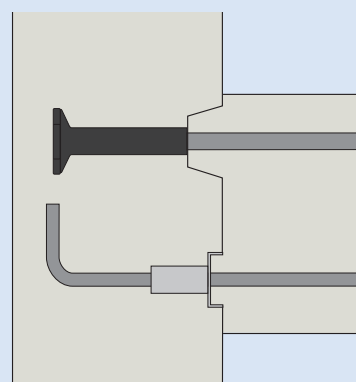

KSN Anchor at top and Ancon Coupler  
Box on bottom

# Ancon KSN Anchors



## Key Design Considerations

### Effective Embedment Depth

The range of Ancon KSN Anchors, sizes 12mm to 20mm, may be used with anchor effective embedment between 75mm and 260mm.

### Concrete Conditions

The structural concrete compressive strength shall be in the range C32/40 to C50/60. The tables in this brochure are based on C32/40. Please contact Leviaat for other concrete grades as the capacity of the system improves with an increase in concrete strength.

The concrete in which KSN Anchors are embedded should be uncracked. This is normal for anchors embedded in walls. The minimum wall thickness is 175mm.

### Moment Connections

The design procedure for moment connection assumes that the top or bottom of the wall is at least three times the effective embedment of the anchor ( $h_{eff}$ ) measured from the centreline of the anchor.

### Structural Analysis

The analysis of the structure should be based on the assumption of linear elastic behaviour. Plastic (yield line) methods and moment redistribution may not be used.

### Shear Capacity

The shear capacity of the joint must be checked (see page 19). In tests with anchors at the top and bottom of the slab, no distress was evident that might be related to vertical shear in the plane of the face of the wall.

### Seismic Applications

The anchors have not been tested in seismic conditions and therefore the design tables may overestimate the load capacity if used in seismic applications.

### Design Resistance

Calculated with concrete partial material factor taken as  $\gamma_c=1.5$  and steel partial material factor taken as  $\gamma_s=1.15$ .

### Design Software

Our free design program is available to download from [www.ancon.co.uk](http://www.ancon.co.uk) to simplify the specification of KSN Anchors. This easy-to-use interactive software enables calculations for moment connections and tension only applications.



## Anchor Selection Examples

### Design examples for KSN top anchor with standard timber carrier:

<b>A)</b>	Load condition:	<b>Direct tensile load</b>
	Wall depth:	225mm
	Wall concrete:	C32/40
	Tension applied:	175kN/m
	Slab main reinforcement spacing:	200mm c/c
	Assuming anchors at 200mm c/c :	$N_{Ed} = 175 \times 0.200 = 35\text{kN}$ per anchor

From table page 10, anchors suitable for 225mm thick wall and 35kN load.

KSN12S @ 200mm c/c	Anchor design resistance $N_{Rd} = 37.4\text{kN}$
KSN12M @ 200mm c/c	Anchor design resistance $N_{Rd} = 41.8\text{kN}$
KSN16S @ 200mm c/c	Anchor design resistance $N_{Rd} = 39.4\text{kN}$
KSN16M @ 200mm c/c	Anchor design resistance $N_{Rd} = 43.0\text{kN}$
KSN20S @ 200mm c/c	Anchor design resistance $N_{Rd} = 41.8\text{kN}$

The values in the table are not in bold which means that the anchors are limited by the concrete design resistance.

Where the anchor capacity is limited by the concrete resistance, We recommend the use of secondary wall reinforcement when the anchor head does not reach the wall back reinforcement (refer to page 17).

From page 17: To prevent non ductile failure without additional wall reinforcement, with wall thickness of 225mm <230mm choose KSN16M @ 200mm c/c Anchor design resistance  $N_{Rd} = 43 \text{ kN}$  >  $N_{Ed} = 35\text{kN}$ . No additional reinforcement required.

<b>B)</b>	Load condition:	<b>Moment connection</b>
	Wall depth:	225mm
	Wall concrete:	C32/40
	Slab thickness:	225mm
	Cover to top reinforcement:	25mm
	Moment applied:	$M_{Ed} = 60\text{kN.m/m}$
	Slab main reinforcement spacing:	200mm c/c
	From slab design:	$M_{Ed} = 60\text{kN.m/m}$ with $z = 182\text{mm}$
	Top anchor applied tension:	$N_{Ed} = M_{Ed}/z = 330\text{kN/m}$
	Assuming anchors at 200mm c/c	$N_{Ed} = 330 \times 0.200 = 66\text{kN}$ per anchor.

From table page 12 to 14, anchors suitable for 225mm thick wall and 66kN load

KSN16S @ 200mm c/c in 225mm slab	Anchor design resistance $N_{Rd} = 85.9\text{kN}$
KSN16M @ 200mm c/c in 225mm slab	Anchor design resistance $N_{Rd} = 87.4\text{kN}$
KSN20S @ 200mm c/c in 225mm slab	Anchor design resistance $N_{Rd} = 104.5\text{kN}$

The KSN16S and KSN20S anchors are limited by the concrete design resistance (value not in bold in tables).

The KSN16M is limited by the reinforcement design resistance (value in bold).

Choose KSN16M @ 200mm c/c as the anchors are suitable for full elastic design without the need for additional reinforcement.

<b>C)</b>	Load condition:	<b>Moment connection</b>
	Wall depth:	240mm
	Wall concrete:	C32/40
	Slab thickness:	250mm
	Cover to top reinforcement:	25mm
	Moment applied:	$M_{Ed} = 95\text{kN.m/m}$
	Slab main reinforcement spacing:	200mm c/c
	From slab design:	$M_{Ed} = 95\text{kN.m}$ with $z = 202\text{mm}$
	Top anchor applied tension:	$N_{Ed} = M_{Ed}/z = 470\text{kN/m}$
	Assuming anchors at 200mm c/c	$N_{Ed} = 470 \times 0.200 = 94\text{kN}$ per anchor.

From table page 12 to 14, anchors suitable for 240mm wall and 94kN

KSN20S @ 200mm c/c in 250mm slab	Anchor design resistance $N_{Rd} = 103.8\text{kN}$
----------------------------------	--

The KSN20S anchors are limited by the concrete design resistance (value not in bold in tables).

Where the anchor capacity is limited by the concrete resistance, we recommend the use of secondary wall reinforcement when the anchor head does not reach the wall back reinforcement (refer to page 17).

Actual wall thickness 240mm is greater than 220mm, recommended maximum thickness without additional reinforcement.

Therefore provide 2Nr 10mm diameter links per anchor as secondary wall reinforcement to prevent non ductile failure.

# Ancon KSN Anchors




## Direct Tensile Concrete Design Resistance Loads

### Single line of anchors in direct tension without moment:

#### KSN Anchors Flush with Concrete

Anchor Ref.	Rebar Dia. (mm)	Anchor Length (mm)	Minimum Wall Thickness (mm)	Embedment Depth $h_{eff}$ (mm)	Anchor - Direct Tensile Resistance Load $N_{Rd}$ (kN) C32/40 Concrete at Various Horizontal Spacings (mm)						
					150	200	250	300	350	400	450
KSN12S	12	115	175	109	24.6	32.8	41.0	<b>49.2</b>	<b>49.2</b>	<b>49.2</b>	<b>49.2</b>
KSN12M	12	150	175	144	28.3	37.7	47.1	<b>49.2</b>	<b>49.2</b>	<b>49.2</b>	<b>49.2</b>
KSN16S	16	130	175	124	26.2	35.0	43.7	52.5	61.2	65.1	65.1
KSN16M	16	160	185	154	29.2	39.0	48.7	58.5	68.2	78.0	<b>87.4</b>
KSN16L	16	190	215	184	32.0	42.6	53.3	63.9	74.6	85.3	<b>87.4</b>
KSN20S	20	150	175	144	28.3	37.7	47.1	56.6	66.0	75.4	81.5
KSN20M	20	190	215	184	32.0	42.6	53.3	63.9	74.6	85.3	95.9
KSN20L	20	230	255	224	35.3	47.0	58.8	70.6	82.3	94.1	105.8




#### KSN Anchors with Timber Carrier (Anchor Inset 33mm from Face of Concrete)

Anchor Ref.	Rebar Dia. (mm)	Anchor Length (mm)	Minimum Wall Thickness (mm)	Embedment Depth $h_{eff}$ (mm)	Anchor - Direct Tensile Resistance Load $N_{Rd}$ (kN) C32/40 Concrete at Various Horizontal Spacings (mm)						
					150	200	250	300	350	400	450
KSN12S	12	115	175	142	28.1	37.4	46.8	<b>49.2</b>	<b>49.2</b>	<b>49.2</b>	<b>49.2</b>
KSN12M	12	150	210	177	31.4	41.8	<b>49.2</b>	<b>49.2</b>	<b>49.2</b>	<b>49.2</b>	<b>49.2</b>
KSN16S	16	130	190	157	29.5	39.4	49.2	59.1	68.9	78.8	<b>87.4</b>
KSN16M	16	160	220	187	32.2	<b>43.0</b>	53.7	64.5	75.2	86.0	<b>87.4</b>
KSN16L	16	190	250	217	34.7	46.3	57.9	69.4	81.0	<b>87.4</b>	<b>87.4</b>
KSN20S	20	150	210	177	31.4	41.8	52.3	62.7	73.2	83.6	94.1
KSN20M	20	190	250	217	34.7	46.3	57.9	69.4	81.0	92.6	104.2
KSN20L	20	230	290	257	37.8	50.4	63.0	75.6	88.2	100.8	113.4

Design Example A. See page 9

**Notes:** All edges assumed to be at least  $1.5 \times h_{eff}$  from anchor centreline.

**Bold** figures indicate performance equal or greater than reinforcement design resistance.






## Double Line of Identical Anchors in Direct Tension Without Moment:


### KSN Anchors Flush with Concrete

Anchor Ref.	Rebar Dia. (mm)	Anchor Length (mm)	Minimum Wall Thickness (mm)	Embedment Depth $h_{eff}$ (mm)	Slab Depth (mm)	Anchor - Direct Tensile Resistance Load $N_{Rd}$ (kN) C32/40 Concrete at Various Horizontal Spacings (mm)							
						150	200	250	300	350	400	450	
KSN12S	12	115	175	109	200	10.4	13.9	17.3	20.8	24.2	27.7	31.2	
					300	17.9	23.9	29.9	35.8	41.8	47.8	53.7	
KSN12M	12	150	175	144	200	9.0	12.1	15.1	18.1	21.1	24.1	27.1	
					300	15.6	20.8	26.0	31.2	36.4	41.6	46.8	
KSN16S	16	130	175	124	200	9.5	12.6	15.8	18.9	22.1	25.2	28.4	
					300	16.5	22.0	27.5	33.0	38.5	44.0	49.5	
KSN16M	16	160	185	154	200	8.5	11.3	14.1	17.0	19.8	22.6	25.5	
					300	14.8	19.8	24.7	29.6	34.6	39.5	44.4	
KSN16L	16	190	215	184	200	7.8	10.4	12.9	15.5	18.1	20.7	23.3	
					300	13.6	18.1	22.6	27.1	31.6	36.1	40.7	
KSN20S	20	150	175	144	200	8.5	11.3	14.2	17.0	19.9	22.7	25.5	
					300	15.1	20.1	25.1	30.1	35.1	40.2	45.2	
KSN20M	20	190	215	184	200	7.5	10.0	12.5	15.1	17.6	20.1	22.6	
					300	13.3	17.8	22.2	26.6	31.1	35.5	40.0	
KSN20L	20	230	255	224	200	6.8	9.1	11.4	13.6	15.9	18.2	20.5	
					300	12.1	16.1	20.1	24.1	28.2	32.2	36.2	

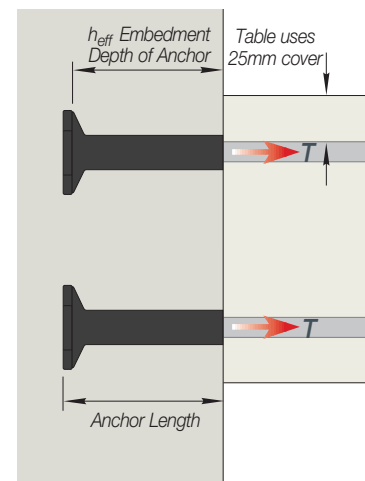

### KSN Anchors with Timber Carrier (Anchor Inset 33mm from Face of Concrete)


Anchor Ref.	Rebar Dia. (mm)	Anchor Length (mm)	Minimum Wall Thickness (mm)	Embedment Depth $h_{eff}$ (mm)	Slab Depth (mm)	Anchor - Direct Tensile Resistance Load $N_{Rd}$ (kN) C32/40 Concrete at Various Horizontal Spacings (mm)							
						150	200	250	300	350	400	450	
KSN12S	12	115	175	142	200	9.1	12.1	15.2	18.2	21.2	24.3	27.3	
					300	15.7	20.9	26.2	31.4	36.6	41.9	47.1	
KSN12M	12	150	210	177	200	8.2	10.9	13.6	16.3	19.0	21.7	24.5	
					300	14.1	18.7	23.4	28.1	32.8	37.5	42.2	
KSN16S	16	130	190	157	200	8.4	11.2	14.0	16.8	19.6	22.4	25.2	
					300	14.7	19.6	24.4	29.4	34.2	39.1	44.0	
KSN16M	16	160	220	187	200	7.7	10.3	12.8	15.4	18.0	20.5	23.1	
					300	13.4	17.9	22.4	26.9	31.4	35.9	40.3	
KSN16L	16	190	250	217	200	7.2	9.5	11.9	14.3	16.7	19.1	21.4	
					300	12.5	16.6	20.8	25.0	29.1	33.2	37.4	
KSN20S	20	150	210	177	200	7.7	10.2	12.8	15.4	17.9	20.5	23.0	
					300	13.6	18.1	22.6	27.2	31.7	36.2	40.8	
KSN20M	20	190	250	217	200	6.9	9.2	11.6	13.9	16.2	18.5	20.8	
					300	12.3	16.4	20.5	24.5	28.6	32.7	36.8	
KSN20L	20	230	290	257	200	6.4	8.5	10.6	12.7	14.9	17.0	19.1	
					300	11.3	15.0	18.8	22.5	26.3	30.1	33.8	

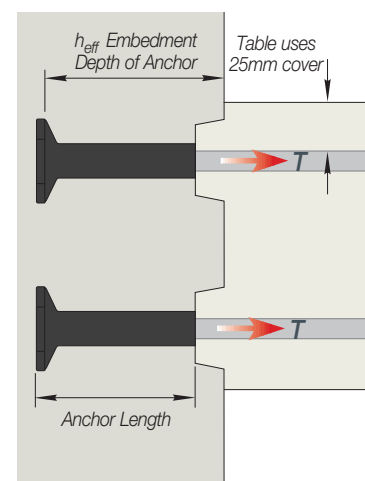

**Notes:** All edges assumed to be at least  $1.5 \times h_{eff}$  from anchor centreline.

**Bold** figures indicate performance equal or greater than reinforcement design resistance.

# Ancon KSN Anchors

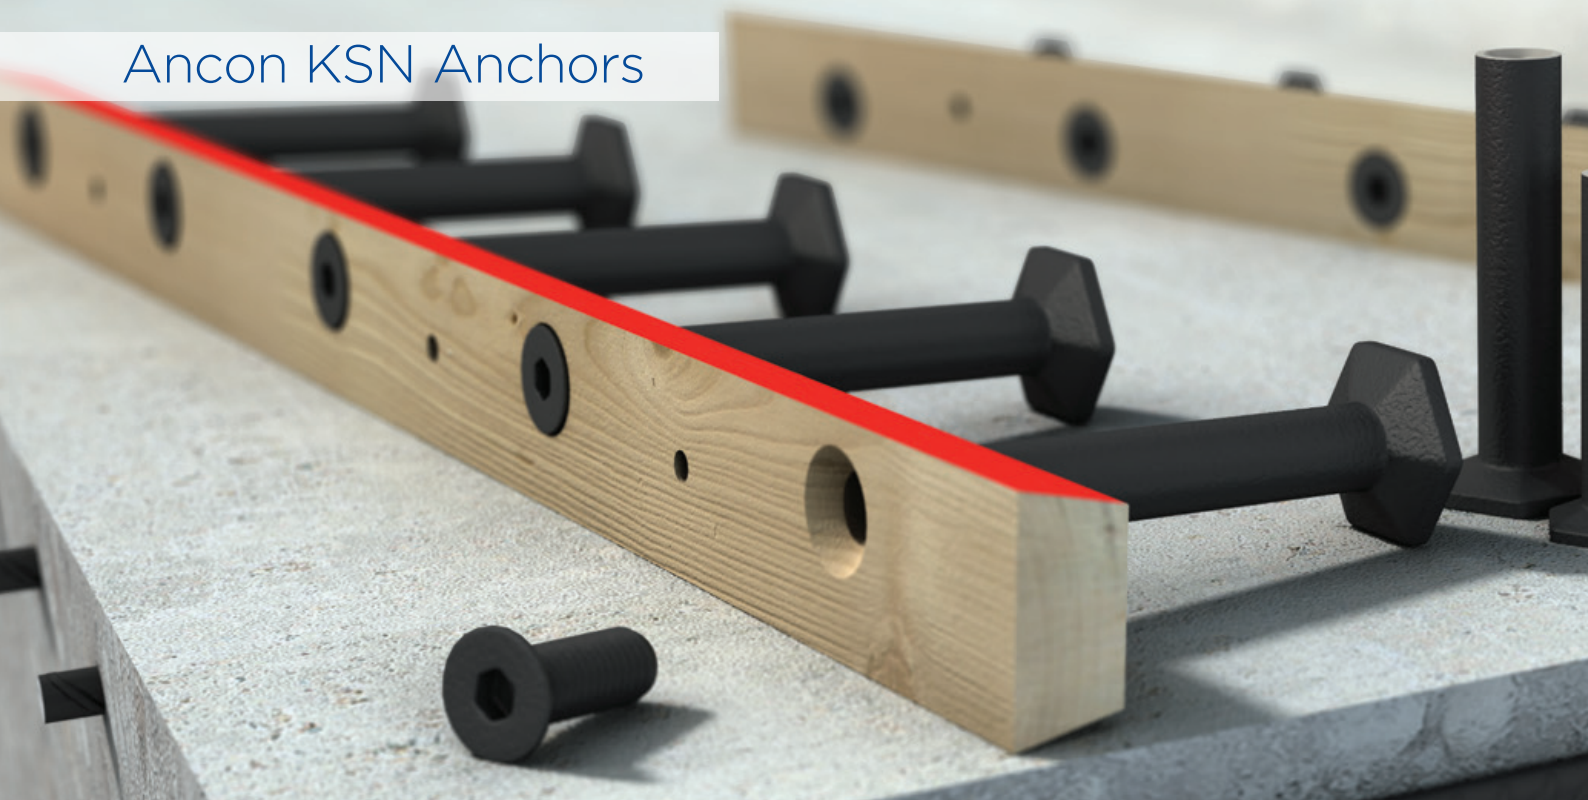


## Tensile concrete design resistance loads in wall-to-slab connections:

KSN Anchors with Timber Carrier (Anchor Inset 33mm from Face of Concrete)  
Moment Connection - Slab Top Main Steel Reinforcement 25mm Cover

Rebar Dia. (mm)	Anchor Length (mm)	Minimum Wall Thickness (mm)	Embedment Depth $h_{eff}$ (mm)	Slab Depth (mm)	Anchor - Direct Tensile Design Resistance Load $N_{Rd}$ (kN) C32/40 Concrete at Various Spacings						
					Horizontal Spacing (mm)						
KSN Anchor KSN12S					150	175	200	225	250	275	300
12	115	175	142	175	49.2	49.2	49.2	49.2	49.2	49.2	49.2
				200	49.2	49.2	49.2	49.2	49.2	49.2	49.2
				225	49.2	49.2	49.2	49.2	49.2	49.2	49.2
				250	49.2	49.2	49.2	49.2	49.2	49.2	49.2
				275	45.7	45.7	45.7	45.7	46.8	49.2	49.2
				300	39.2	39.2	39.2	42.1	46.8	49.2	49.2
KSN Anchor KSN12M											
12	150	210	177	175	49.2	49.2	49.2	49.2	49.2	49.2	49.2
				200	49.2	49.2	49.2	49.2	49.2	49.2	49.2
				225	49.2	49.2	49.2	49.2	49.2	49.2	49.2
				250	49.2	49.2	49.2	49.2	49.2	49.2	49.2
				275	49.2	49.2	49.2	49.2	49.2	49.2	49.2
				300	49.2	49.2	49.2	49.2	49.2	49.2	49.2

**Notes:** Refer to key design considerations on page 8. In addition, the tables assume no close edges and a cover to the top and bottom reinforcement connecting to the anchor of 25mm. For other cover, please contact Leviat. **Bold** figures indicate performance equal to or greater than reinforcement design resistance. If not bold, anchor resistance is limited by the concrete design resistance and we recommend the use of secondary wall reinforcement (see page 17).

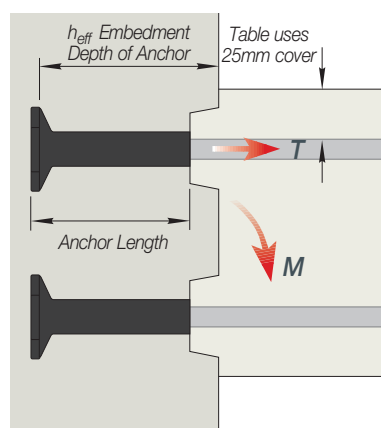


For bottom anchorage options, see pages 7 and 16.





## KSN Anchors with Timber Carrier (Anchor Inset 33mm from Face of Concrete) Moment Connection - Slab Top Main Steel Reinforcement 25mm Cover

Rebar Dia. (mm)	Anchor Length (mm)	Minimum Wall Thickness (mm)	Embedment Depth h <sub>eff</sub> (mm)	Slab Depth (mm)	Anchor - Direct Tensile Design Resistance Load N <sub>Rd</sub> (kN) C32/40 Concrete at Various Spacings							
					Horizontal Spacing (mm)							
KSN Anchor KSN16S					150	175	200	225	250	275	300	
16	130	190	157	175	73.8	86.1	87.4	87.4	87.4	87.4	87.4	
				200	73.8	86.1	87.4	87.4	87.4	87.4	87.4	
				225	73.8	85.9	85.9	85.9	85.9	85.9	85.9	
				250	72.8	72.8	72.8	72.8	72.8	72.8	72.8	
				275	62.4	62.4	62.4	62.4	62.4	62.4	62.4	
				300	54.0	54.0	54.0	54.0	54.0	54.1	59.1	
KSN Anchor KSN16M												
16	160	220	187	175	80.6	87.4	87.4	87.4	87.4	87.4	87.4	
				200	80.6	87.4	87.4	87.4	87.4	87.4	87.4	87.4
				225	80.6	87.4	87.4	87.4	87.4	87.4	87.4	87.4
				250	80.6	87.4	87.4	87.4	87.4	87.4	87.4	
				275	80.6	87.4	87.4	87.4	87.4	87.4	87.4	
				300	80.6	87.4	87.4	87.4	87.4	87.4	87.4	
KSN Anchor KSN16L												
16	190	250	217	175	86.8	87.4	87.4	87.4	87.4	87.4	87.4	
				200	86.8	87.4	87.4	87.4	87.4	87.4	87.4	87.4
				225	86.8	87.4	87.4	87.4	87.4	87.4	87.4	
				250	86.8	87.4	87.4	87.4	87.4	87.4	87.4	
				275	86.8	87.4	87.4	87.4	87.4	87.4	87.4	
				300	86.8	87.4	87.4	87.4	87.4	87.4	87.4	

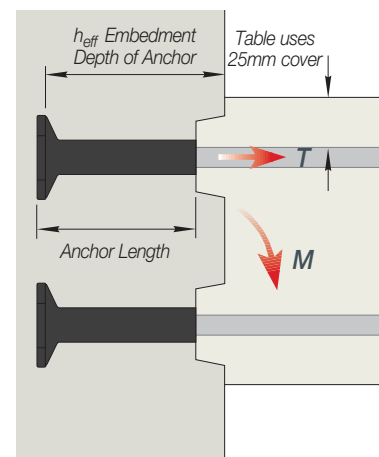

**Notes:** Refer to key design considerations on page 8. In addition, the tables assume no close edges and a cover to the top and bottom reinforcement connecting to the anchor of 25mm. For other cover, please contact Leviat. **Bold** figures indicate performance equal to or greater than reinforcement design resistance. If not bold, anchor resistance is limited by the concrete design resistance and we recommend the use of secondary wall reinforcement (see page 17).

Design Example B. See page 9


# Ancon KSN Anchors

KSN Anchors with Timber Carrier (Anchor Inset 33mm from Face of Concrete)  
Moment Connection - Slab Top Main Steel Reinforcement 25mm Cover

Rebar Dia. (mm)	Anchor Length (mm)	Minimum Wall Thickness (mm)	Embedment Depth h <sub>eff</sub> (mm)	Slab Depth (mm)	Anchor - Direct Tensile Design Resistance Load N <sub>Rd</sub> (kN) C32/40 Concrete at Various Spacings						
					Horizontal Spacing (mm)						
KSN Anchor KSN20S					150	175	200	225	250	275	300
20	150	210	177	175	78.4	91.5	104.5	117.6	130.7	136.6	136.6
				200	78.4	91.5	104.5	117.6	130.7	136.6	136.6
				225	78.4	91.5	104.5	117.6	121.8	121.8	121.8
				250	78.4	91.5	103.8	103.8	103.8	103.8	103.8
				275	78.4	89.5	89.5	89.5	89.5	89.5	89.5
				300	77.9	77.9	77.9	77.9	77.9	77.9	77.9
KSN Anchor KSN20M											
20	190	250	217	175	86.8	101.3	115.7	130.2	136.6	136.6	136.6
				200	86.8	101.3	115.7	130.2	136.6	136.6	136.6
				225	86.8	101.3	115.7	130.2	136.6	136.6	136.6
				250	86.8	101.3	115.7	130.2	136.6	136.6	136.6
				275	86.8	101.3	115.7	130.2	136.6	136.6	136.6
				300	86.8	101.3	115.7	130.2	136.6	136.6	136.6
KSN Anchor KSN20L											
20	230	290	257	175	94.5	110.2	126.0	136.6	136.6	136.6	136.6
				200	94.5	110.2	126.0	136.6	136.6	136.6	136.6
				225	94.5	110.2	126.0	136.6	136.6	136.6	136.6
				250	94.5	110.2	126.0	136.6	136.6	136.6	136.6
				275	94.5	110.2	126.0	136.6	136.6	136.6	136.6
				300	94.5	110.2	126.0	136.6	136.6	136.6	136.6

**Notes:** Refer to key design considerations on page 8. In addition, the tables assume no close edges and a cover to the top and bottom reinforcement connecting to the anchor of 25mm. For other cover, please contact Leviat. **Bold** figures indicate performance equal to or greater than reinforcement design resistance. If not bold, anchor resistance is limited by the concrete design resistance and we recommend the use of secondary wall reinforcement (see page 17).

Design Example C. See page 9

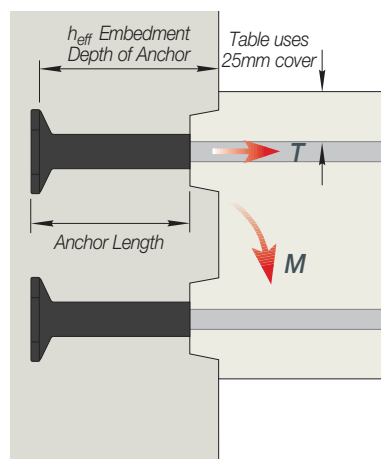





## Reinforcement Details

Correct detailing of reinforcement in accordance with appropriate design codes and the recommendations provided here will ensure Ancon KSN Anchors attain the designed performance.

### Top and Bottom Slab Anchor Connection

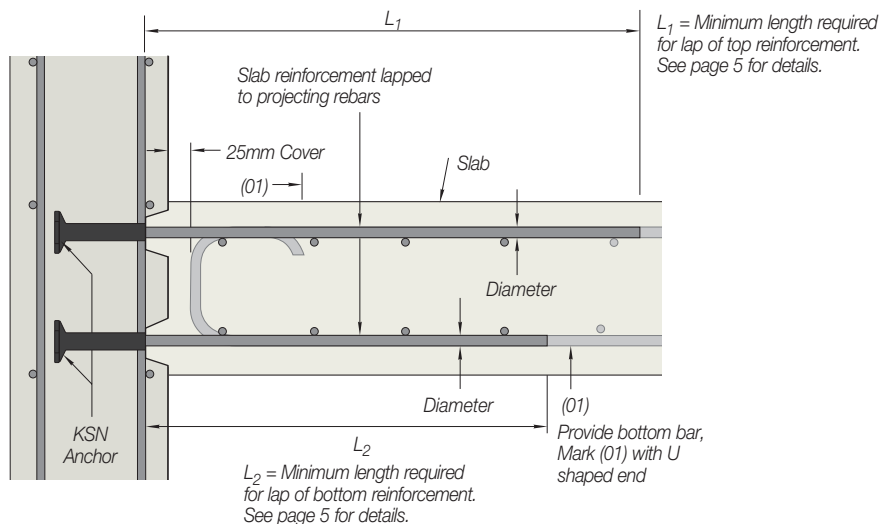


### Wall Edge Reinforcement Details

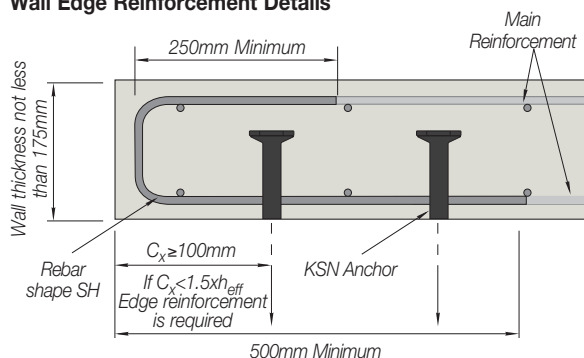

**Reinforcement:** Minimum edge reinforcement, 12mm diameter Grade B500B  
The main reinforcement can be detailed to incorporate the above shape noted as rebar SH

### Wall-Part Edge Section

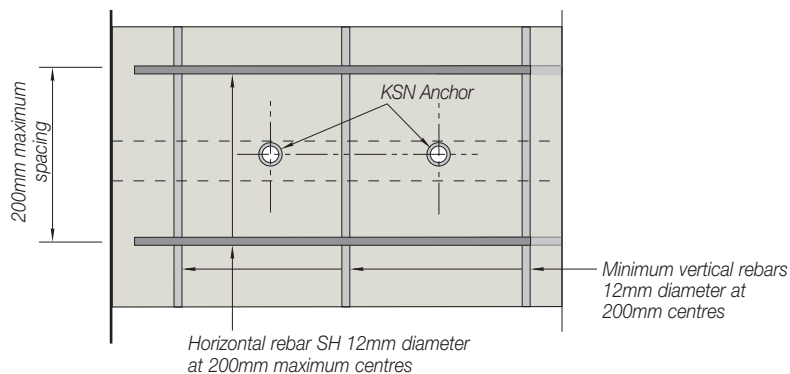

### Wall-Part Edge Elevation



# Ancon KSN Anchors

## Bottom Anchor Design Guidance

In the moment connection configuration, the tension at the joint is resisted by the top anchor and the compression by the concrete. However, part of the span bottom reinforcement needs to be anchored in the wall according to BS EN 1992:1-1 (Eurocode 2) Clause 9.3.1.2. This anchorage of bottom reinforcement may be provided using KSN Anchors, an Ancon Eazistrip reinforcement continuity system or an Ancon Coupler Box.

The minimum bottom anchors recommended, based on our test programme, are KSN12S at the same spacing as the top anchors. The Engineer shall check that the tension capacity provided satisfies BS EN 1992:1-1 Clause 9.3.1.2 and upgrade the anchor size if necessary using the tension only table of this brochure (page 10) to check anchorage provided.

### Example of bottom anchor design

Assumptions:

- Top anchors @ 200mm/c,
- Slab is 200mm thick with 25mm cover top and bottom,
- Simply supported slab designed for nominal moment at the joint,
- Span reinforcement 16mm diameter @ 200mm/c = 1005mm<sup>2</sup>/m
- Moment at support is 60kN.m and slab design gives  $z = 156\text{mm}$ .
- Shear is  $V_{Ed} = 30\text{kN/m}$


From EC2 clause 9.3.1.2, minimum area of reinforcement to be anchored at support is 50% of span reinforcement, anchorage tension load to be provided by  $F = V_{Ed} d/z$  according to clause 9.2.1.4.

Assume KSN12S bottom anchors at same spacing as top anchors = 200mm:

- Area provided is  $565\text{mm}^2 > 1005/2 = 503\text{mm}^2$
- Bottom reinforcement anchorage tension required is  $F = V_{Ed} d/z = 30 \times 169 / 156 = 32.5\text{kN}$
- Tension resistance provided by KSN12S anchors @ 200mm/c = 37.4kN from tension table (page 10). KSN12S anchors at 200mm/c are satisfactory for bottom reinforcement anchorage.




KSN Anchor System being used with an Eazistrip System

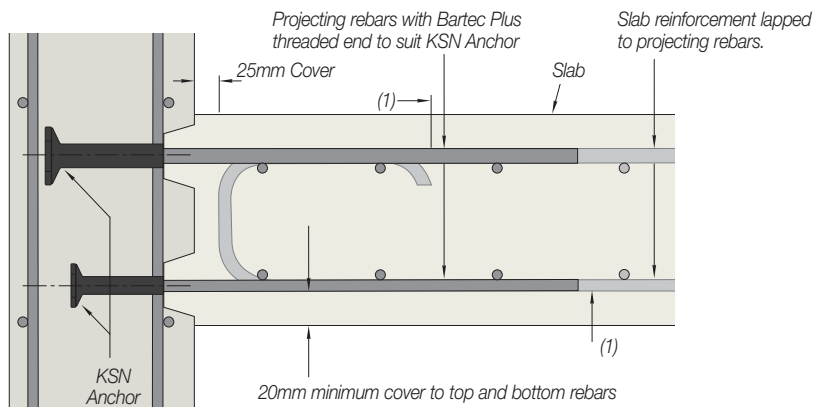


Wall / Slab Section - KSN Anchors at top and bottom

Other bottom anchorage options are an Eazistrip system and an Ancon Coupler Box.

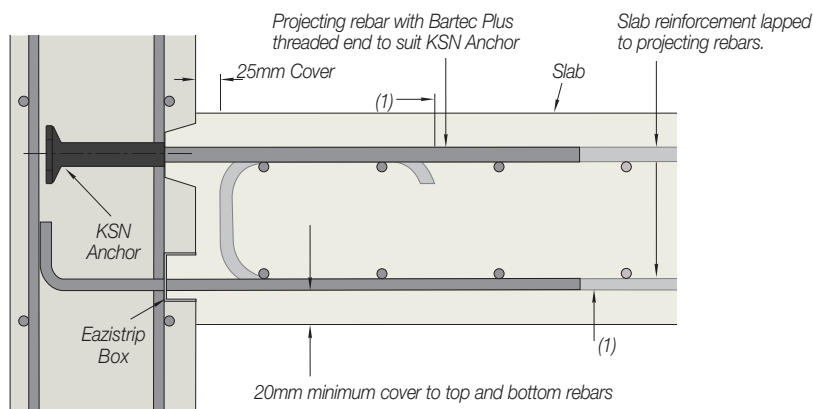

Wall / Slab Section - KSN Anchor at Top / Eazistrip System on bottom

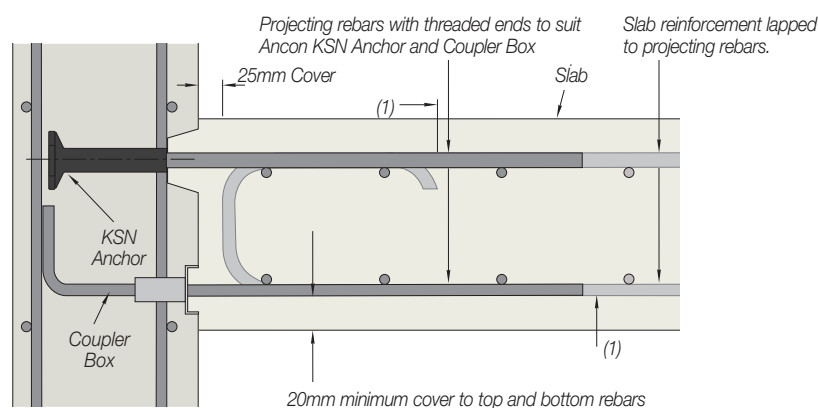

Wall / Slab Section - KSN Anchor at Top / Coupler Box on bottom

## Guidance Regarding Ductility Requirement

The design of slab-wall connections should not be made in isolation but should be as part of a structural system. Ductility requirements of such a connection will depend on the robustness requirements of the structure of which it is part and the strategy chosen to achieve global robustness.

In the UK, the Building Regulations for England and Wales, for Scotland and for Northern Ireland all require buildings to be designed so that in the event of an accident the structure will not suffer collapse to an extent disproportionate to the cause.

Similarly, BS EN 1990 and BS EN 1991-1-7 (Eurocode 0 clause 2.1 and Eurocode 1 Part 1-7 clause 3) describe the necessity for the design to take into account accidental situations whether identified (clause 3.2) or unspecified (clause 3.3), and to mitigate the associated risk. Several possible strategies are proposed; one of them is the provision of sufficient robustness for the structure


by ensuring that structural members and materials have sufficient ductility, and are capable of absorbing significant strain energy without rupture [3.2 (3)]. If such ductility at the slab-wall connection is required to participate in the global robustness of the structure, one approach to comply with this requirement is the provision of additional wall reinforcement to prevent non-ductile failure of the anchor under accidental load.

This secondary reinforcement can be in the form of transverse links to be placed above and below the anchor in tension.


Proposed details are shown here.

Anchor Ref.	Bar Diameter (mm)	Anchor Length (mm)	Wall Thickness Above Which Secondary Wall Reinforcement Required* (mm)	Secondary Wall Reinforcement Requirement. 2 Links per Anchor. Link Diameter (mm)	Maximum Dimension A (mm)	Maximum Dimension B (mm)
KSN12S	12	115	185	8	120	50
KSN12M	12	150	220	8	120	50
KSN16S	16	130	200	8	120	55
KSN16M	16	160	230	8	120	55
KSN16L	16	190	260	8	120	55
KSN20S	20	150	220	10	135	60
KSN20M	20	190	260	10	135	60
KSN20L	20	230	300	10	135	60

\*Where the standard 33mm timber anchor carrier is used.

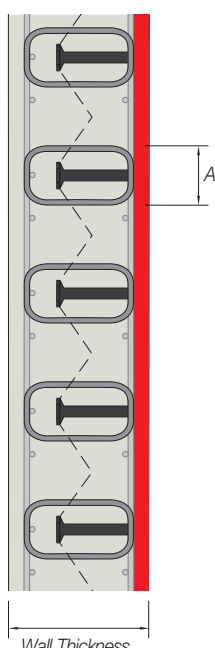

Horizontal Section  
Plan View

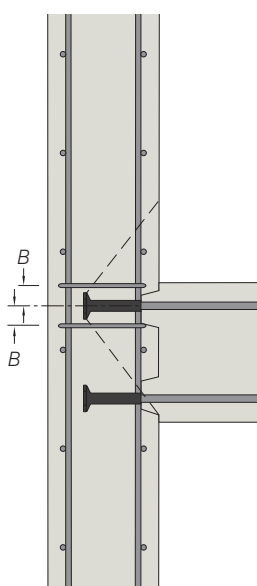

Vertical Section  
Side View




# Ancon KSN Anchors

## KSN Corner Guidance

KSN Anchors may be used to connect slabs to walls at corners as long as certain conditions are met.


### Inside Corner

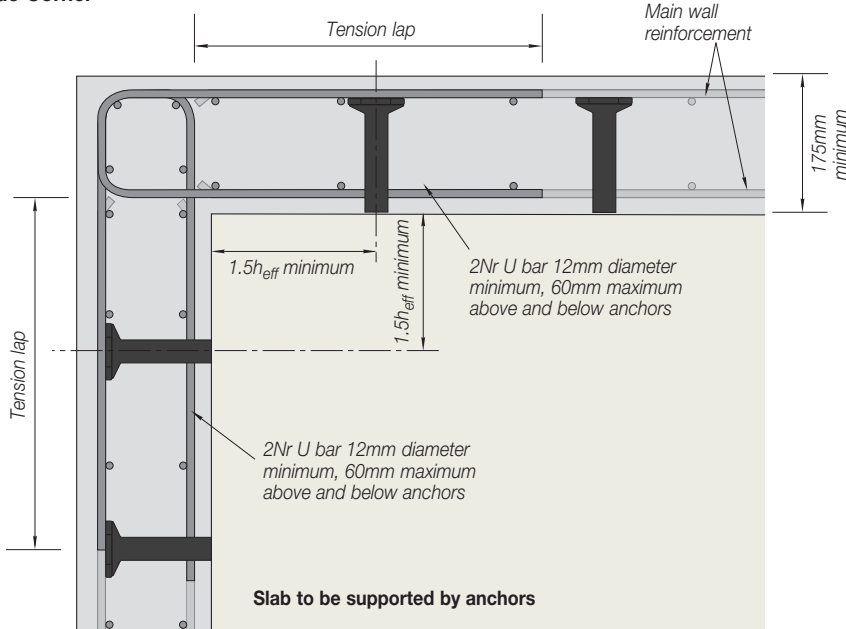

#### Recommendations:

- Additional U-shaped rebars are to be provided above and below the corner anchors
- Careful attention to detailing of the anchors at corner locations is required to avoid the possibility of a clash of the continuity bars

### Re-entrant Corner

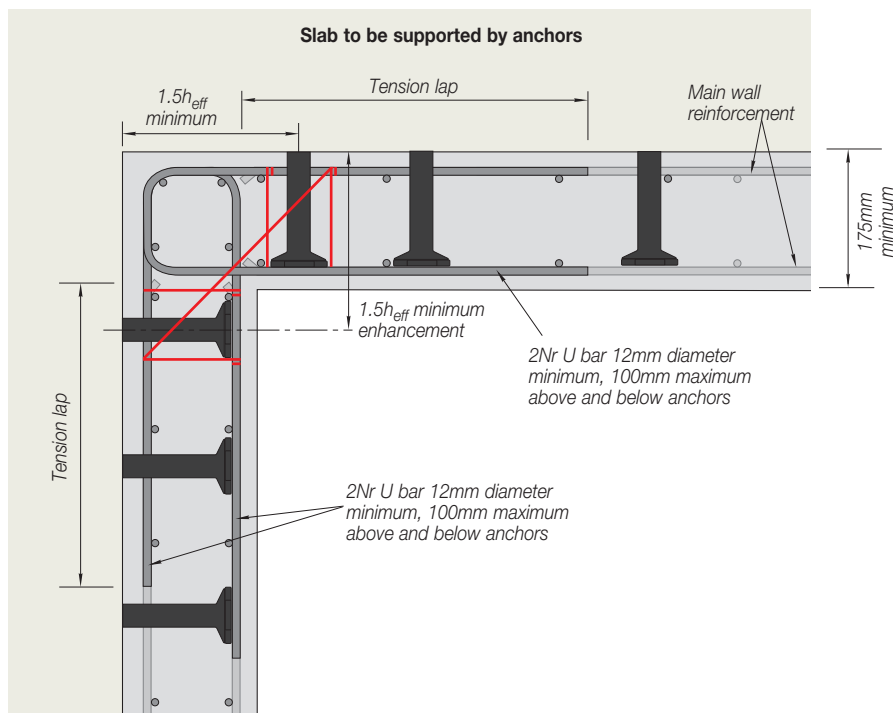

#### Recommendations:

- Additional U-shaped rebars are to be provided above and below the corner anchors
- For high moments a special detail may be required, for example links and diagonal bars (shown red), as recommended in BS EN 1992-1-1 Annex J and UK national annex
- Anchors at the re-entrant corner will have to resist higher loads than the current anchors due to the larger area of slab supported and therefore need to be designed for the specific loads applied to them

## Guidance on Shear Checks

The shear capacity of the joint (vertical shear at the interface and horizontal shear in the wall) must be checked by the designer. The anchor carrier is creating a shear key for the wall-to-slab connection that complies with figure 6.9 of BS EN 1992:1-1 (Eurocode 2) for indented construction joint. Tests undertaken with top and bottom anchors have shown no sign of distress due to shear at the interface, however suitability must be checked by the designer. The effective wall depth to be used in the calculation of the horizontal shear resistance is limited to 175mm or the anchor embedment, whichever is the greater.

### The following shear checks at the joint need to be undertaken:

- The shear on the vertical interface between the end of the slab and the face of the wall (1):  
See Table below for indicative capacity of the shear keys for one or two lines of KSN Anchors using Ancon standard timber carrier. For higher shear load or different carrier please contact us.

#### Shear key capacity according to EC2 of two lines of anchors on the vertical interface between the end of the slab and the face of the wall in kN/m for different concrete grades based on 69mm x 33mm timber carrier

C32/40	C35/45	Concrete Grade C40/50	C45/55	C50/60
96.6	101.2	115.0	124.2	133.4

#### Shear key capacity according to EC2 of one line of anchors on the vertical interface between the end of the slab and the face of the wall in kN/m for different concrete grades based on 69mm x 33mm timber carrier

C32/40	C35/45	Concrete Grade C40/50	C45/55	C50/60
48.3	50.6	57.5	52.1	66.7

- The horizontal shear in the wall within the depth of the slab. The horizontal shear in the wall shall be checked by the Engineer using *EN 1992-1-1 clause 6.2.2 Members not requiring design shear reinforcement of EC2* taking into account the reduction factor  $\beta = a_v / (2d)$  indicated in 6.2.2 (6). The applied joint shear  $V_{Ed,jt}$  should be calculated by taking into account any other shear forces applied to the wall; it will depend on the wall height.

The wall shear resistance  $V_{Rd,c}$  depends on the wall reinforcement and is defined by:

$$V_{Rd,c} = [C_{Rd,c} k (100 \rho_1 f_{ck})^{1/3} + k_1 \sigma_{cp}] b_w d_w / \beta \quad (6.2.a)$$

$$\text{with a minimum of } V_{Rd,c,min} = [v_{min} + k_1 \sigma_{cp}] b_w d_w / \beta \quad (6.2.b)$$

$$\text{and a maximum of } V_{Rd,c,max} = 0.5 b_w d_w v_{cd}$$

$$\text{with } C_{Rd,c} = 0.18/\gamma_c = 0.12 \text{ from UK National Annex}$$

$$k = 1 + (200/d_w)^{0.5} \leq 2.0 \text{ with } d_w \text{ in mm}$$

$$\rho_1 = A_{s1}/(b_w d_w) \leq 0.02 \text{ ratio of wall vertical reinforcement on the face of the wall near the slab.}$$

$f_{ck}$  is the characteristic compressive cylinder strength of concrete at 28 days

$$k_1 = 0.15 \text{ from UK National Annex}$$

$$\sigma_{cp} = N_{Ed}/A_c < 0.2 f_{cd} \text{ with } N_{Ed} \text{ compression force applied to the cross section and } A_c \text{ the area of concrete of the cross section.}$$

$$b_w \text{ is the wall width resisting the shear load and } d_w = \max(h_{eff}, 175\text{mm}), \text{ wall effective depth}$$

$$\beta = \alpha_{vj} / (2d_w) \text{ with } \alpha_{vj} \text{ the shear span of the joint equal to the distance between the slab neutral surface and the edge of the anchor head}$$

$$p_h \text{ is the projection of anchor head (see adjacent table for details)}$$

$$v_{min} = 0.035 k^{3/2} f_{ck}^{0.5} \text{ from UK National Annex}$$


$$v = 0.6 [1 - f_{ck}/250]$$

$$f_{cd} \text{ is the design value of the concrete compressive strength}$$


$$x \text{ is the distance between the slab soffit and the Neutral surface of the slab}$$

$$s \text{ is the depth of the concrete stress block}$$

### Contact Leviat for a step by step design example.

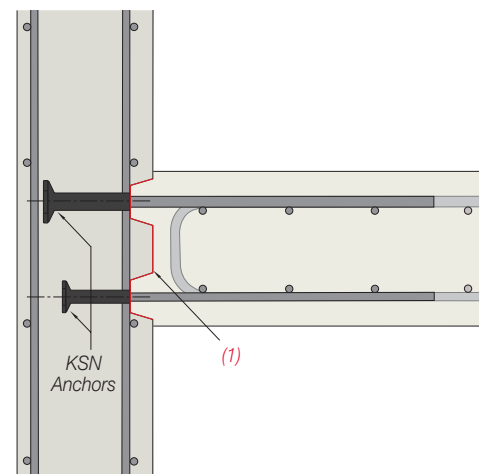

Wall/Slab Section - KSN Anchors

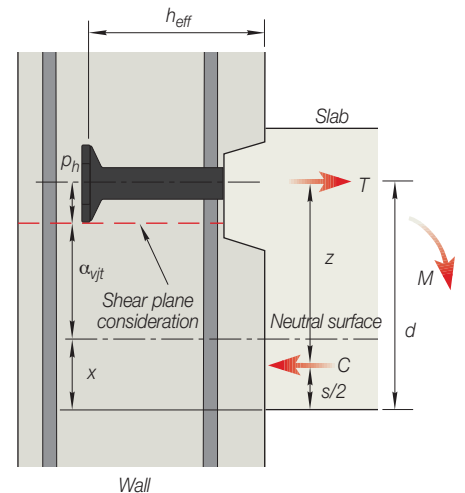

Shear plane considered at the edge of the anchor head

Anchor Type	Projection of Anchor Head $p_h$ (mm)
KSN12S, KSN12M	20.0
KSN16S, KSN16M, KSN16L	26.5
KSN20S, KSN20M, KSN20L	32.5

# Ancon KSN Anchors

## Installation Guidance

Reinforcement continuity systems contribute to the stability of a structure and therefore it is essential that the correct installation procedures are followed. Brief installation guidance is given here. A more detailed installation guide is issued to site with the system.

### Prior to Installation

Before installation, any loose anchors should be tightened to the timber carrier to ensure that the anchors will not move during concreting. Normal handling precautions to avoid physical injury apply and personal protection equipment should be worn.

The tape on the face of the timber strip should not be removed as it will prevent concrete ingress in the hex socket.

A formwork release agent should be applied to the timber strip and any spillage must be removed from the anchors.

The omission of the release agent will prevent the easy removal of the timber strip at a later stage and if the timber strip cannot be completely removed, the capacity of the joint may be compromised.



The timber carrier supporting the anchors is positioned against the formwork at the required location of the adjoining slab, orientated to the instructions on the label which indicates that the coloured side should face up. The timber is fixed to the formwork with nails. It is important that the strip is set to the correct position within tolerance, is the right way up and fixed to prevent any movement during concreting.



The KSN anchors are to be used only with Bartec Plus continuation bars provided by us.

The Bartec Plus continuation bar thread should be checked to be free of any dirt and be positioned at the anchor location and rotated to fit into the anchor thread. The connection should then be tightened by using a hand wrench. No torqueing is required.

After tightening, the exposed thread length should be no more than 2-4mm for sizes KSN12 and KSN20, and no more than 10mm for size KSN16.



Other wall reinforcement should be installed to the Engineer's details, based on our recommendations. The concrete is then cast and once it has reached sufficient strength, the formwork is removed to reveal the face of the timber strip with the protective tape.

When installation of the continuation bars is required, the tape is removed to reveal the socket head cap screws which can be unscrewed using the corresponding Allen key (supplied with each order). Three M10 tee nuts have been inserted in each timber strip in order to allow for the use of M10 studs/bolts to help push the first timber strip out.




Slab reinforcement should be installed to the Engineers details. The slab is cast to complete the application.




## Installation Tolerances

In order to ensure adequate cover to the continuation bar and to comply with the design, it is important that the timber anchor carrier is set to the correct position, the right way up and fixed to prevent any movement during concreting. The carrier's installation tolerances are shown below and these tolerances are not cumulative.

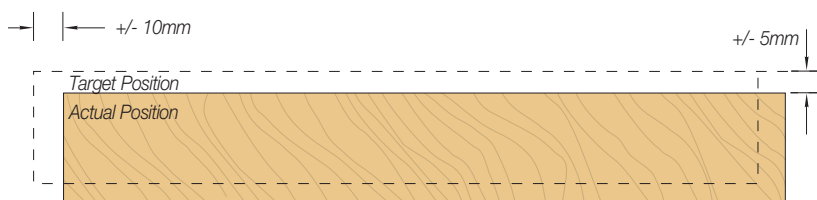


Timber Anchor Carrier Setting Out Deviation Allowances

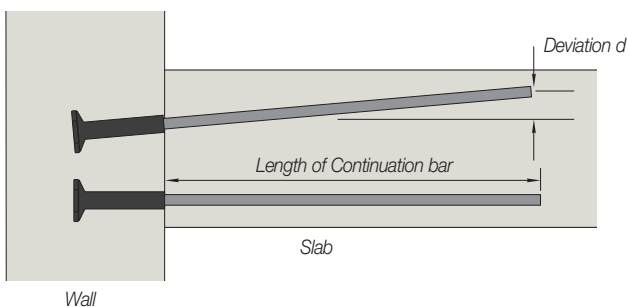

Vertical Transverse Section Alignment of Anchor  
Side View

Length of Continuation Bar (mm)	Deviation d
700	+/- 2mm
1000	+/- 3mm
1500	+/- 5mm

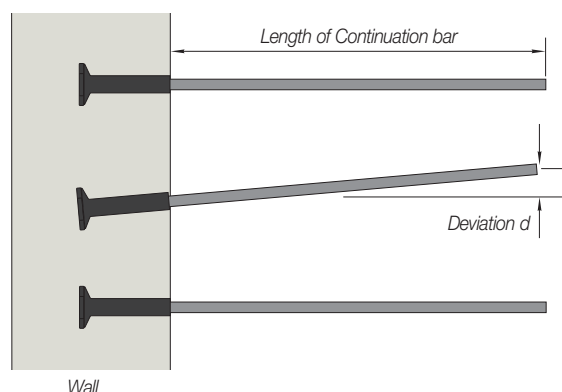

Horizontal Transverse Section Alignment of Anchor  
Plan View

Length of Continuation Bar (mm)	Deviation d
700	+/- 10mm
1000	+/- 12mm
1500	+/- 20mm



### Tools required for installation:

KSN 12 - 10mm A/F Allen Key / Hex Head Wrench  
KSN 16 - 12mm A/F Allen Key / Hex Head Wrench  
KSN 20 - 14mm A/F Allen Key / Hex Head Wrench  
M10 Stud/bolt to push timber away from concrete  
Hand Wrench to suit continuation bar diameter

### Other requirement:

Formwork release agent


# Ancon KSN Anchors

## Guidance for cutting standard length anchor carrier


In some instances, at the end of a run of anchors for example, a non-standard carrier length may be required. In order to achieve this, the standard timber carrier may be cut to suit, under the following conditions:

- Anchor carriers are to be installed end to end without any gaps between them at all locations
- The specified spacing between anchors must never be exceeded
- The actual anchor spacing can be reduced to below the specified spacing but with a minimum of 150mm
- Minimum edge distance should be 100mm

### Cut at the end of a run

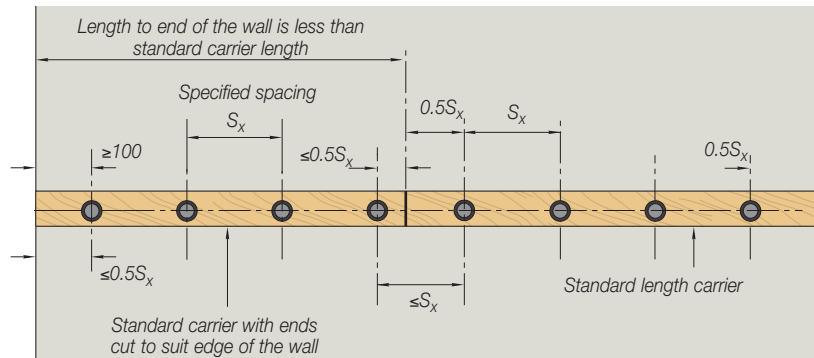


Wall Elevation

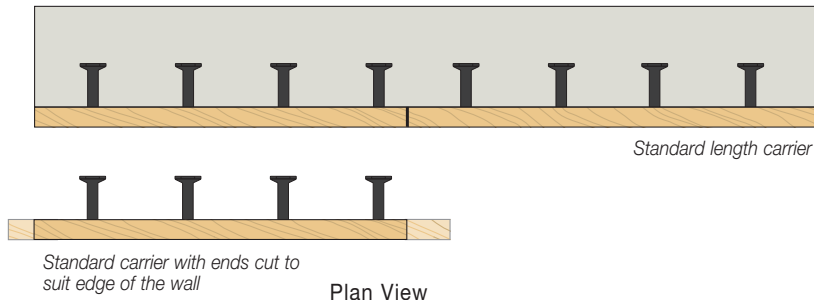


Plan View

### Cut in the middle of a run

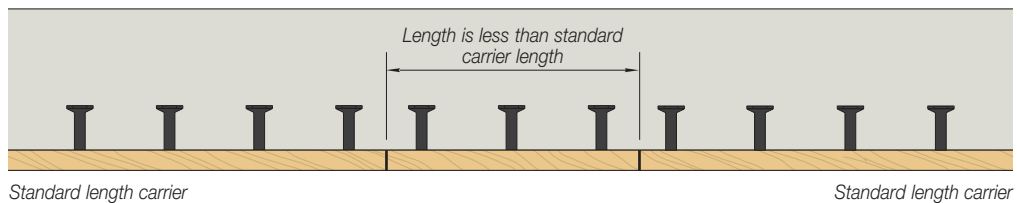

Plan View

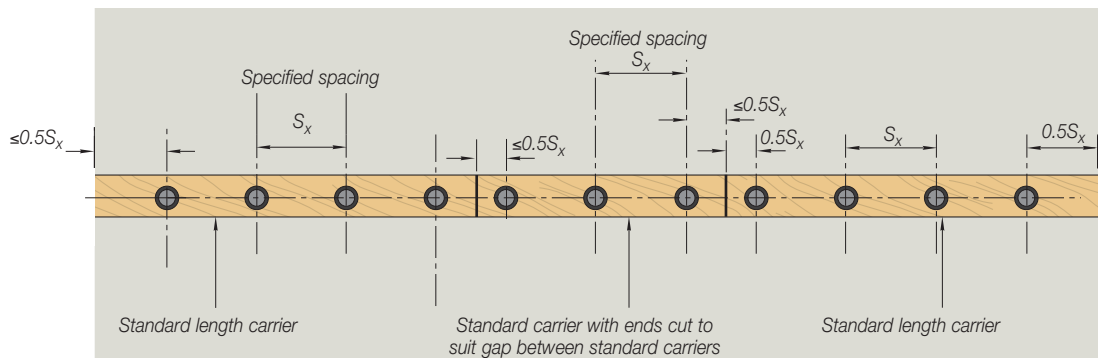

Wall Elevation

## Project References



HOME Arts Centre, Manchester, UK



Alder Hey Children's Hospital, Liverpool, UK



Soul Apartments, Brisbane, Australia




The Oracle Towers, Brisbane, Australia

## Other Ancon Products

### KSN Anchor Box


Where slab-to-wall connections are subject to a combination of shear and tensile loads, Ancon KSN Anchors are used in a single row along the slab section centreline to provide an innovative, cost-effective fixing detail. In this instance, KSN Anchors are supplied fixed to a metal box that closely matches the slab thickness, creating a beneficial indent in the wall for the full height and length of the joint. We provide a four-step EC2-compliant design method for the Ancon KSN Anchor Box, independently verified by University of Sheffield, UK.

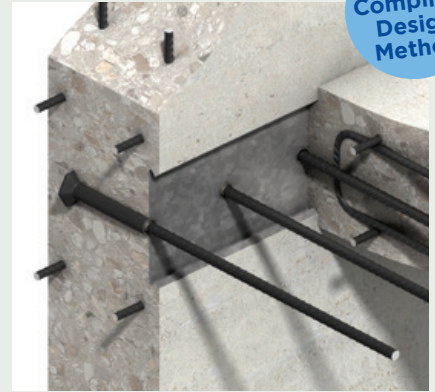

EC2-  
Compliant  
Design  
Method

### Reinforcing Bar Couplers

The use of reinforcing bar couplers can provide significant advantages over lapped joints. Design and construction of the concrete can be simplified and the amount of reinforcement required can be reduced. The Ancon range includes Bartec Plus parallel threaded, TT tapered threaded and MBT mechanically bolted couplers.

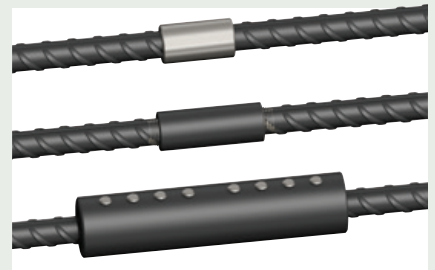


### CB Coupler Box

The Ancon CB Coupler Box is an alternative to using two rows of KSN Anchors to provide reinforcement continuity at slab-to-wall connections. Like KSN Anchors, it allows engineers to design connections without the traditional restrictions on bar length and bar diameter of re-bend/pull-out continuity systems and eliminates manual bar straightening on site. The CB Coupler Box is available in a standard range. Ancon CARES-approved CXL mechanical couplers are supplied fixed to a metal casing and, once the thread protection is removed, accept Ancon CXL parallel-threaded reinforcing bars.



### Shear Load Connectors

Ancon DSD and ESD Shear Load Connectors are used to transfer shear across expansion and contraction joints in concrete. They are more effective at transferring load and allowing movement to take place than standard dowels, and can be used to eliminate double columns at structural movement joints in buildings. A Lockable Dowel is available for temporary movement joints in post-tensioned concrete.

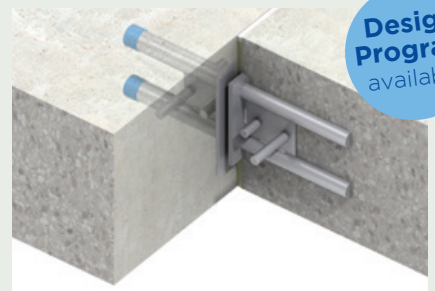

Design  
Program  
available

### Punching Shear Reinforcement

Used within a slab to provide additional reinforcement around columns, Ancon Shearfix is the ideal solution to the design and construction problems associated with punching shear. This CARES-approved system consists of double-headed studs welded to flat rails, positioned around the column head or base. The shear load from the slab is transferred through the studs into the column.



Design  
Program  
available





# Leviat<sup>®</sup>

A CRH COMPANY

Innovative engineered products and  
construction solutions that allow  
the industry to build safer,  
stronger and faster.





## Worldwide contacts for Leviat:

### Australia

**Leviat**  
98 Kurrajong Avenue,  
Mount Druitt Sydney, NSW 2770  
Tel: +61 - 2 8808 3100  
Email: info.au@leviat.com

### Austria

**Leviat**  
Leonard-Bernstein-Str. 10  
Saturn Tower, 1220 Wien  
Tel: +43 - 1 - 259 6770  
Email: info.at@leviat.com

### Belgium

**Leviat**  
Industrielaan 2  
1740 Ternat  
Tel: +32 - 2 - 582 29 45  
Email: info.be@leviat.com

### China

**Leviat**  
Room 601 Tower D, Vantone Centre  
No. A6 Chao Yang Men Wai Street  
Chaoyang District  
Beijing · P.R. China 100020  
Tel: +86 - 10 5907 3200  
Email: info.cn@leviat.com

### Czech Republic

**Leviat**  
Business Center Šafránková  
Šafránková 1238/1  
155 00 Praha 5  
Tel: +420 - 311 - 690 060  
Email: info.cz@leviat.com

### Finland

**Leviat**  
Vädursgatan 5  
412 50 Göteborg / Sweden  
Tel: +358 (0)10 6338781  
Email: info.fi@leviat.com

### France

**Leviat**  
6, Rue de Cabanis  
FR 31240 L'Union  
Toulouse  
Tel: +33 - 5 - 34 25 54 82  
Email: info.fr@leviat.com

### Germany

**Leviat**  
Liebigstrasse 14  
40764 Langenfeld  
Tel: +49 - 2173 - 970 - 0  
Email: info.de@leviat.com

### India

**Leviat**  
309, 3rd Floor, Orion Business Park  
Ghodbunder Road, Kapurbawdi,  
Thane West, Thane,  
Maharashtra 400607  
Tel: +91 - 22 2589 2032  
Email: info.in@leviat.com

### Italy

**Leviat**  
Via F.lli Bronzetti 28  
24124 Bergamo  
Tel: +39 - 035 - 0760711  
Email: info.it@leviat.com

### Malaysia

**Leviat**  
28 Jalan Anggerik Mokara 31/59  
Kota Kemuning, 40460 Shah Alam  
Selangor  
Tel: +603 - 5122 4182  
Email: info.my@leviat.com

### Netherlands

**Leviat**  
Oostermaat 3  
7623 CS Borne  
Tel: +31 - 74 - 267 14 49  
Email: info.nl@leviat.com

### New Zealand

**Leviat**  
2/19 Nuttall Drive, Hillsborough,  
Christchurch 8022  
Tel: +64 - 3 376 5205  
Email: info.nz@leviat.com

### Norway

**Leviat**  
Vestre Svanholmen 5  
4313 Sandnes  
Tel: +47 - 51 82 34 00  
Email: info.no@leviat.com

### Philippines

**Leviat**  
2933 Regus, Joy Nostalg,  
ADB Avenue  
Ortigas Center  
Pasig City  
Tel: +63 - 2 7957 6381  
Email: info.ph@leviat.com

### Poland

**Leviat**  
Ul. Obornicka 287  
60-691 Poznan  
Tel: +48 - 61 - 622 14 14  
Email: info.pl@leviat.com

### Singapore

**Leviat**  
14 Benoi Crescent  
Singapore 629977  
Tel: +65 - 6266 6802  
Email: info.sg@leviat.com

### Spain

**Leviat**  
Polígono Industrial Santa Ana  
c/ Ignacio Zuloaga, 20  
28522 Rivas-Vaciamadrid  
Tel: +34 - 91 632 18 40  
Email: info.es@leviat.com

### Sweden

**Leviat**  
Vädursgatan 5  
412 50 Göteborg  
Tel: +46 - 31 - 98 58 00  
Email: info.se@leviat.com

### Switzerland

**Leviat**  
Grenzstrasse 24  
3250 Lyss  
Tel: +41 - 31 750 3030  
Email: info.ch@leviat.com

### United Kingdom

**Leviat**  
President Way, President Park,  
Sheffield, S4 7UR  
Tel: +44 - 114 275 5224  
Email: info.uk@leviat.com

### United States of America

**Leviat**  
6467 S Falkenburg Rd.  
Riverview, FL 33578  
Tel: (800) 423-9140  
Email: info.us@leviat.us

### For countries not listed

Email: info@leviat.com

## Leviat.com

#### Notes regarding this catalogue

© Protected by copyright. The construction applications and details provided in this publication are indicative only. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Whilst every care has been exercised in the preparation of this publication to ensure that any advice, recommendations or information is accurate, no liability or responsibility of any kind is accepted by Leviat for inaccuracies or printing errors. Technical and design changes are reserved. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.



For more information on these products, contact:

**Leviat**

President Way  
President Park  
Sheffield, S4 7UR  
United Kingdom

Tel: +44 (0) 114 275 5224

Fax: +44 (0) 114 276 8543

Email: [info.ancon.uk@leviat.com](mailto:info.ancon.uk@leviat.com)

For sales and technical enquiries:

Email: [reinforcement.uk@leviat.com](mailto:reinforcement.uk@leviat.com)

[Ancon.co.uk](http://Ancon.co.uk)

[Leviat.com](http://Leviat.com)

**Imagine. Model. Make.**

**[Leviat.com](http://Leviat.com)**